


## Data sheet

### LOOP SEP 40 kN

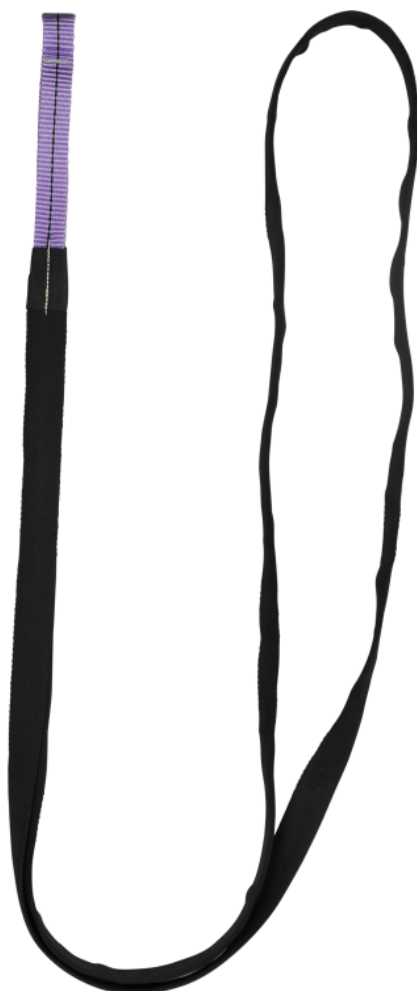

#### GENERAL

Art. no.:	L-0321-0,75
EAN:	4030281099680
Standard:	EN 354:2010 EN 795-B:2012

E-class number:	40-02-01-04
Customs no.:	63079098

## Data sheet

### LOOP SEP 40 kN

LOOP SEP was specially developed for working at sharp edges. The tensile force of 40 kN and the flexible casing made from special cut-proof fibres make the loop practically indestructible. The fixing is stitched conically so that the loop does not get caught at this critical point.

#### FEATURES

Breaking load, major axis:

40,00 kN

Diameter:	30,00 mm
Hand-washing:	40 °C
Suitable for edges:	yes
Max. service life:	10 Years
Max. number of persons:	1
Patent	
Temperature:	from 45 °C to -35 °C

Area of application:

Arborists, Fire brigade / Rescue / Special Forces,  
Metal Construction, Power Supplies / -  
Transmission / Telecommunications, Rope Access  
/ Rigging

#### DIMENSIONS

Size:	0,75m
Weight:	0,23 kg

## MATERIAL

Material: Polyester

---