

BALLAST SYSTEM 1890

THE BALLAST SYSTEM 1890

is a free standing rooftop solution designed for installation of any kind of panel antenna, small radio link or other common telecom equipment. The mounting tube height is 2.5 or 3 m (8 or 10 ft).

FLEXIBILITY


The ballast system is a non-penetrating rooftop system. The antenna mounting tube is fitted to one of the corners of the ballast frame which makes it possible to place the antenna close to the edge of the building. This increases coverage and may reduce the required height of the installation.

QUALITY

The mounting tube and support tubes with brackets are made of anodized aluminium. The ballast frame is made of galvanized steel components. This gives the system excellent corrosion resistance and a long life. A 3 mm (0,12 in) EPDM rubber sheet is included and should be placed under the ballast frame to protect the roof.

EASY ASSEMBLY

The light weight aluminium components makes the assembly extremely fast and easy.

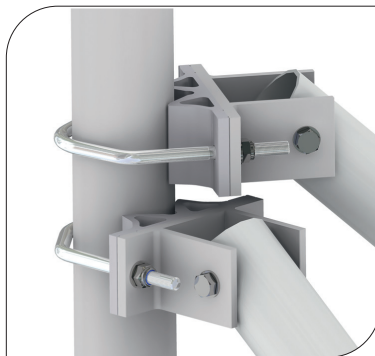

ORDER AND TECHNICAL INFORMATION

DRAWING NO: CD 990774-2500 / CD 990774-3000

FUNCTION DESCRIPTION: Freestanding non-penetrating rooftop. Typical for installation of panel antennas, radio links or other common telecom equipment. *(Ballast not included)*

MECHANICAL DATA:

Tubes: Aluminium, Nature anodized 20µm
 Brackets: Aluminium, Nature anodized 20µm
 Ballast frame: Galvanized steel
 U-bolts: Acid proof stainless steel
 Fasteners: Acid proof stainless steel

PACKAGE DIMENSIONS P/N:	LENGTH:	WIDTH:	HEIGHT:	WEIGHT:
	2500 mm (98 in)	400 mm (16 in)	200 mm (8 in)	154 kg (340 lb)
	3000 mm (118 in)	400 mm (16 in)	200 mm (8 in)	157 kg (346 lb)

BALLAST: Concrete slab 400 x 400 x 40 mm (16 x 16 x 1,6 in)

NOTE! Ballast not included.

Quality Design