

OFFSET ANTENNA SUPPORT

THE OFFSET ANTENNA SUPPORTS

Are available in 5 different lengths with an offset from 360 mm (14,2 in) up to 1000 mm (39,4 in). They are designed for installation of panel antennas, microwave antennas and other common telecom equipment such as RRU's, TMA's etc.

FLEXIBILITY



The offset antenna support can handle a wide range of all common frame leg designs such as round, square, angular etc. The support is very light and still has a high loadbearing capacity.

QUALITY

All components are made of anodized aluminium and stainless steel which gives the support excellent corrosion resistance and a very long lifespan.

EASY ASSEMBLY

The choice of materials makes the product very light which makes the handling and installation very easy.

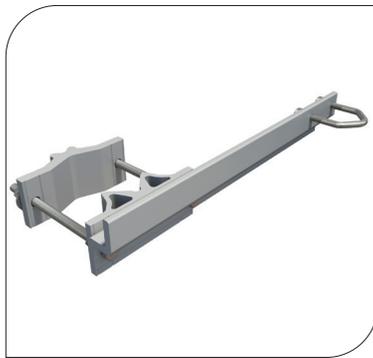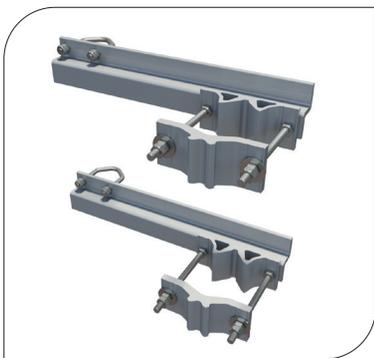

ORDER AND TECHNICAL INFORMATION

DRAWING NO:	CD 990909-500 / CD 990909-650 / CD 990909-750 / CD 990909-941 / CD 990909-1150			
FUNCTION DESCRIPTION:	Offset Antenna Support in two levels designed for installation of panel antennas, microwave antennas and other common telecom equipment such as RRU's, TMA's etc. Available in five different lengths with an offset from 360 – 1000 mm. (14,2 – 39,4 in). Antenna mounting tube is not included, must be ordered separately.			
MOUNTING SPAN:	TUBES: ○	SQUARE PROFILES: □	90° ANGLE: ∨	60° ANGLE: ∨
Minimum	Ø25 mm (1,0 in)	35 x 35 mm (1,4 x 1,4 in)	35 x 35 mm (1,4 x 1,4 in)	40 mm (1,6 in) opening
Maximum	Ø120 mm (4,7 in)	90 x 90 mm (3,5 x 3,5 in)	90 x 90 mm (3,5 x 3,5 in)	100 mm (4,0 in) opening
PACKAGE DIMENSIONS:	LENGTH: mm (in)	WIDTH: mm (in)	HEIGHT: mm (in)	WEIGHT: kg (lb)
Offset				
360 mm	790 (31,1)	130 (5,1)	90 (3,5)	6,5 (14)
500 mm	790 (31,1)	130 (5,1)	90 (3,5)	7,3 (16)
600 mm	790 (31,1)	130 (5,1)	90 (3,5)	7,8 (17)
800 mm	290 (11,4)	185 (7,3)	150 (5,9)	3,8 (8,4)
	950 (37,4)	100 (4,0)	50 (2,0)	5,0 (11)
1000 mm	290 (11,4)	185 (7,3)	150 (5,9)	3,8 (8,4)
	1150 (45,3)	100 (4,0)	50 (2,0)	6,1 (13)

NOTE! Mounting tubes are not included. Must be ordered separately.