


# KITO M3 SERIES CHAIN BLOCKS

**3** Year \*\*\*  
Warranty

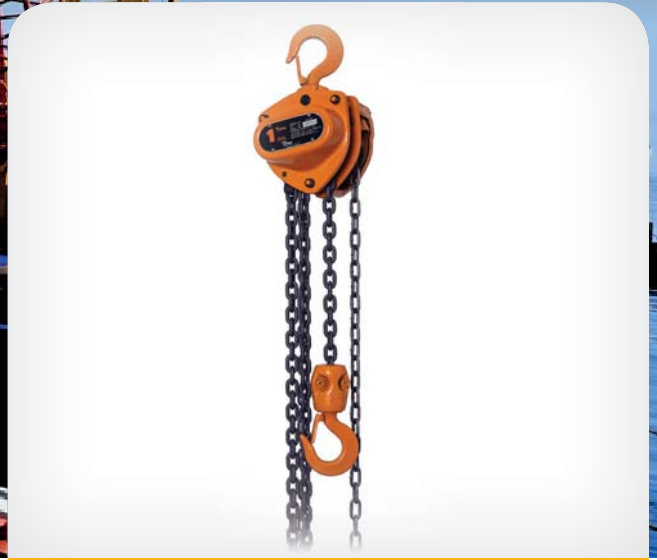

## Applications

- ✓ Mining, construction, engineering, infrastructure, manufacturing
- ✓ Ideal for processing plants, manufacturing plants, job sites, construction sites, projects

## Features

- ✓ Gear case and hand wheel cover resistant to external shocks.
- ✓ Double enclosure helps prevent mud and dust from entering internal mechanisms.
- ✓ Double pawl spring increasing reliability.
- ✓ Also available with overload limiter which prevents hoist overload and protects the operator.
- ✓ Reliable mechanical brake.
- ✓ Stopper prevents excessive lowering.
- ✓ Needle and ball roller bearings allow maximum mechanical efficiency with minimum effort.
- ✓ KITO manufactured Grade 100 load chain.
- ✓ Available in standard lift heights of 3 and 6 metres, close coupled to KITO push and geared trolleys.
- ✓ Tailored lift heights can be configured in KITO PWB's dedicated assembly shop.

**Australian Standard:** AS 1418.2

Durable, safe and functional. KITO M3 Series Chain Blocks designed for maximum durability and safety in continuous heavy duty applications.

**Capacity:** 500kg – 50T


## Options



**TSP plain trolley**  
500kg – 5T



**TSG geared trolley**  
500kg – 10T



**Overload limiter (OLL)**

# KITO M3 Series Chain Blocks

## Specifications



Capacity	Part No. (3m Lift)	Part No. (6m Lift)	Headroom (mm)	Close Headroom (mm)	Load Chain Dia (mm) x fall	Weight* (kg)	Load Chain Dia x Pitch (mm)	Load Chain Part No.
<b>M3 Series Chain Block</b>								
500kg	43269	47769	360	370	5.0 x 1	10.0	5.0 x 15	44863
1 tonne	43271	47444	410	420	6.3 x 1	11.5	6.3 x 19.1	46722
1.5 tonne	43273	46637	470	485	7.1 x 1	14.5	7.1 x 21	46731
2 tonne	43275	47882	500	505	8.0 x 1	21.0	8.0 x 24	44864
3 tonne	43277	47883	540	565	7.1 x 2	24.0	9.0 x 27	46731
5 tonne	43279	47884	660	720	9.0 x 2	41.0	9.0 x 27	46735
7.5 tonne	43281	63286	840	940	9.0 x 3	63.0	9.0 x 27	46735
10 tonne	49575	49577	850	950	9.0 x 4	83.0	9.0 x 27	46735
<b>M3 Series Chain Block with overload limiter</b>								
500kg	63067	63109	360	380	5.0 x 1	10.0	5.0 x 15	44863
1 tonne	63068	63063	410	420	6.3 x 1	11.5	6.3 x 19.1	46722
2 tonne	63069	63064	500	505	8.0 x 1	21.0	7.1 x 21	44864
3 tonne	63070	63065	540	565	7.1 x 2	24.0	7.1 x 21	46731
5 tonne	63071	63066	660	720	9.0 x 2	41.0	7.1 x 21	46735
10 tonne	64659	64302	850	950	9.0 x 4	83	9.0 x 27	46735

\*Weights shown for Chain Blocks are for standard 3 metre lift models.  
Optional lift heights available.  
Details for larger capacities available on request.

## Also Available



### Explosion Proof M3

0.5T – 3T capabilities  
ATEX Ex IID/G c IIB T4



### High Speed M3

2.5T - 50T capabilities  
Automatic high & low speed change



### SHB Geared Trolley Mount

1T - 10T capabilities  
Ultra-low headroom hand chain hoist

**KITOPWB**

Premium Quality Products

For more information:

Call 1300 792 262

Visit [www.kitopwb.com.au](http://www.kitopwb.com.au)

